
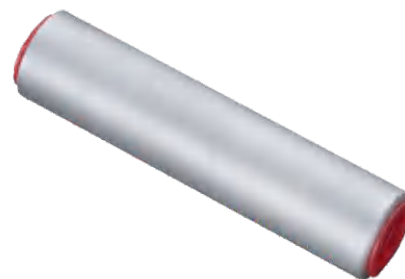


⚡ 10-33kv Aluminium Splice (Staight Through)

- 1.Connectors with equal cross sections
- 2.IEC61238 Standard

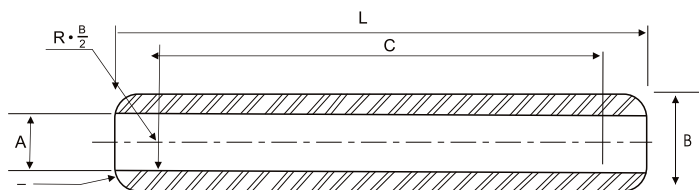

Part No.	Wire range (mm)	Dimensions (mm)			
		A	B	L	C
GLB 16	16	5.5	16	90.5	76.7
GLB 25	25	6.5	16	90.5	77.4
GLB 35	35	8	16	90.5	78.8
GLB 50	50	9	20	106.5	90.3
GLB 70	70	11	20	106.5	92.2
GLB 95	95	12.5	20	106.5	94
GLB 120	120	13.7	25	133	114.3
GLB 150	150	15.5	25	133	116.2
GLB 195	185	17	32	143.5	118.3
GLB 240	240	19.5	32	143.5	120.7
GLB 300	300	23.3	40	216	189
GLB 400	400	26	40	216	192
GLB 500	500	29.1	47	216	185.5
GLB 630	630	32.5	47	216	191.10

Tolerance on barrel thickness : $\pm 7\%$