


SCB Bell-Mouth Copper Cable Lug

1. Material: copper-99.9% pure.
2. Operating Temperature: -55°C to 155°C due to oxygen-free copper
3. Surface: Tin plated.

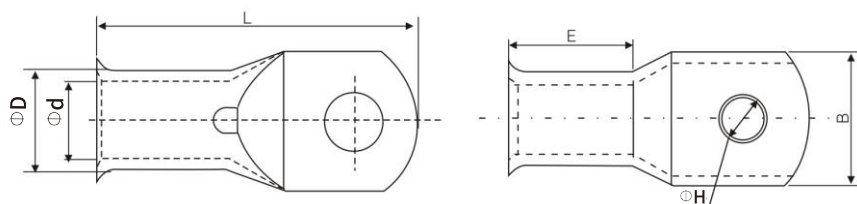

Part No.	Dimensions(mm)					
	ΦH	ΦD	Φd	E	B	L
SCB10-6	6.5	6.6	4.5	11	13	30
SCB10-10	8.3	6.6	4.5	12.5	13	30
SCB16-6	6.5	7.5	5.5	11	14	30.7
SCB16-8	8.3	7.5	5.5	12.5	13	30.7
SCB16-10	10.3	7.5	5.5	16	14	35.9
SCB16-12	12.7	8.1	5.5	18	13	35.9
SCB25-6	6.5	9.1	6.7	13	13	32.2
SCB25-8	8.3	9.1	6.7	13	13	32.2
SCB25-10	10.3	9.1	6.7	16	14	36.9
SCB25-12	12.7	9.1	6.7	18	13	36.9
SCB35-6	6.5	11.0	8.6	16	16	37.6
SCB35-8	8.3	11.0	8.6	16	16	37.6
SCB35-10	10.3	11.0	8.6	17	16	41.5
SCB35-12	12.7	11.0	8.6	17	16	41.5
SCB50-8	8.3	12.4	9.5	18	17	41.0
SCB50-10	10.3	12.4	9.5	18	17	44.0
SCB50-12	12.7	12.4	9.5	19	17	44.0
SCB70-8	8.3	15.0	12.0	22	21.5	52.4
SCB70-10	10.3	15.0	12.0	22	21.5	52.4
SCB70-12	12.7	15.0	12.0	22	21.5	52.4
SCB70-14	14.8	15.0	12.0	22	21.5	52.4
SCB95-8	8.3	17.0	13.4	25	22.5	54.7
SCB95-10	10.3	17.0	13.4	25	22.5	54.7
SCB95-12	12.7	17.0	13.4	25	22.5	54.7
SCB95-14	14.8	17.0	13.4	25	22.5	58.3

Part No.	Dimensions(mm)					
	H	ΦD	Φd	E	B	L
SCB120-8	8.3	19	15	27.5	23	60
SCB120-10	10.3	19	15	27.5	23	60
SCB120-12	12.7	19	15	27.5	23	60
SCB120-14	14.8	19	15	27.5	23	64
SCB150-10	10.3	21.2	16.5	30.0	27	67
SCB150-12	12.7	21.2	16.5	30.0	27	67
SCB150-14	14.8	21.2	16.5	30.0	27	67
SCB150-16	16.5	21.2	16.5	30.0	27	71.4
SCB185-10	10.3	23	19	34.0	30	73
SCB185-12	12.7	23	19	34.0	30	73
SCB185-14	14.8	23	19	34.0	30	73
SCB185-16	16.5	23	19	34.0	30	76.2
SCB240-12	12.7	26.5	21	38.6	38	91.4
SCB240-14	14.8	26.5	21	38.6	38	91.4
SCB240-16	16.5	26.5	21	38.6	38	91.4
SCB300-12	12.7	30	24.5	43.8	42	98
SCB300-14	14.8	30	24.5	43.8	42	98
SCB300-16	16.5	30	24.5	43.8	42	98
SCB400-12	12.7	35	27	50.0	44	104
SCB400-14	14.8	35	27	50.0	44	104
SCB400-16	14.8	35	27	50.0	44	104