


⚡ Mechanical Cable Lug up 42kv with Shear-off-Head Bolt

1. Connector Body: high strength aluminium alloy
2. Contact bolts made of special aluminum alloy or brass tin plated
3. Surface:
Connector Body: tin-plated
5. Center rings: center rings are enclosed for centric conductor positioning
6. Application Conductor: Al or Cu cable
7. Application Standard: IEC61238-1

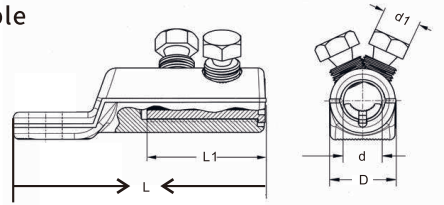

Part No.	Conductor range	Plate Hole Diameter (mm)	Dimension (mm)				Bolt Quantity	Bolt head AF
			D	d	L	L1		
TMCL-25/95	25/95	13 or 17	24	12.8	74	30	1	13
TMCL-35/150	35/150	13 or 17	28	15.8	100	35	1	17
TMCL-95/240	95/240	13 or 17	33	20	128.5	60	2	19
TMCL-120/300	120/300	13 or 17	37	24	133	65	2	22
TMCL-185/400	185/400	13 or 17	42	26	155	80	3	22
TMCL-500/630	500/630	13 or 17	50	33	175	95	3	22 or 27
TMCL-800	800	13, 17 or 21	55	36	195	120	4	22 or 27