


Bimetallic Lug(DTL-2)

Technical Note :

- Material :** Copper Palm - Ec Grade Forged Copper (copper Purity 99.9%)And Al - Ec Grade Aluminium Rod
- Finish :** Natural And Degreased
- Welding Process :** High Speed Friction Welding
- Al Barrel Filled With Oxide Inhabiting Compound And Sealed By Plastic Cap
- All Dimensions Are In Mm Unless Otherwise Specified
- Unspecified Tolerance :** $\pm 2\%$

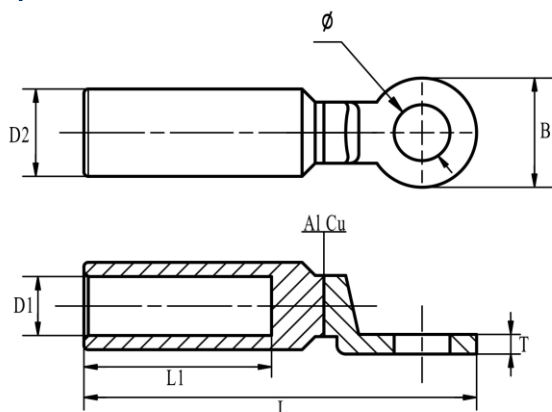

Part No.	Dimensions (mm)						
	$\Phi \pm 0.3$	$D2 \pm 0.5$	$D1 \pm 0.3$	$L \pm 2$	$L1 \pm 1$	$B \pm 0.5$	$T \pm 0.3$
DTL-2-16-10	11	16	6	80	40	20	3
DTL-2-25-10	11	16	7	80	40	20	3
DTL-2-35-10	11	16	8.5	80	40	20	3
DTL-2-50-12	13	20	10	90	43	25	4.5
DTL-2-70-12	13	20	11.5	90	43	25	4.5
DTL-2-95-12	13	20	13.5	90	43	25	4.5
DTL-2-120-12	13	25	15	115	59	30	5.5
DTL-2-150-12	13	25	16.5	115	59	30	5.5
DTL-2-185-12	13	32	18.5	120	60	35	6
DTL-2-240-12	13	32	21	120	60	35	6
DTL-2-300-12	13	34	23.5	130	72	35	6
DTL-2-400-16	17	40	26	160	90	36	7
DTL-2-500-16	17	40	29.5	160	90	36	7
DTL-2-630-16	17	47	32.5	180	92	50	9.5