

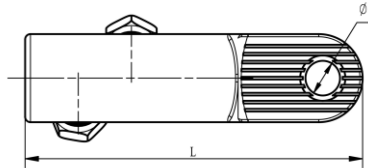


⚡ Mechanical Cable Lug up to 52kv with Shear-off-Head Bolt

1. Material: High strength aluminum alloy body, tin plated
2. Contact bolts made of special aluminum alloy or brass tin plated
3. Aluminium barrel is filed by neutral grease,
4. Dimension in mm
5. Standard according to IEC61238-1



Part No.	Conductor range	Dimensions(mm)						No.of Bolt	Size of Bolt AF
		D	d	L	L1	Ø1	T		
BMCL-16/95	16/95	24	12.5	72	32	13 or 17	10	1	10
BMCL-25/150	25/150	28	15.8	95	35	13 or 17	12.5	1	10
BMCL-95/240	95/240	33	20	113	56	13 or 17	14	2	13
BMCL-120/300	120/300	38	25	125	67	13 or 17	14	2	19
BMCL-185/400-13	185/400	42	26	143	82	13 or 17	14.5	3	19
BMCL-400/630-13	400/630	50	33	165	94	13,17 or 21	20	3	19