


Bell Mouth Copper Cable Lug

1. Bell Mouth Lugs range is specifically designed to accommodate fine stranded fine stranded flexible conductors, Because fine stranded cables have a larger diameter than normal cables, and they tend to splay out after stripping, this range of lugs, funnel the strands into the lugs and make conductor insertion easy.
2. Material: copper-99.9% pure.
3. Operating Temperature:-55°C to 155°C due to oxygen-free copper
4. Surface: Tin plated.
5. Conformant Standards: AS/NZS4325

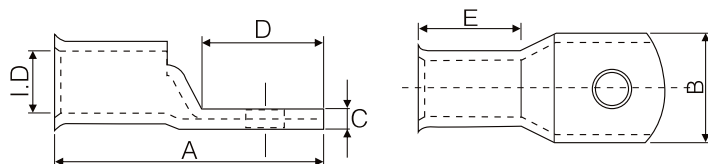

Part No.	Dimensions(mm)						
	Φ	I.D	A	B	C	D	E
CL35-6BM	35	8.2	44	16	3.0	18	21
CL35-8BM	35	8.2	44	16	3.0	18	21
CL35-10BM	34	8.2	46	18	2.6	20	21
CL35-12BM	34	8.2	50	20	2.3	24	21
CL50-6BM	50	9.5	48	18	3.2	20	22
CL50-8BM	50	9.5	48	18	3.2	20	22
CL50-10BM	50	9.5	48	18	3.2	20	22
CL50-12BM	50	9.5	52	21	2.4	24	22
CL70-6BM	70	11.2	54	21	3.3	24	24
CL70-8BM	70	11.2	54	21	3.3	24	24
CL70-10BM	70	11.2	54	21	3.3	24	24
CL70-12BM	70	11.2	54	21	3.3	24	24
CL95-8BM	95	13.4	60	25	3.9	26	27
CL95-10BM	95	13.4	60	25	3.9	26	27
CL95-12BM	95	13.4	60	25	3.9	26	27
CL95-16BM	95	13.4	64	28	3.4	30	27
CL120-10BM	120	15.6	64	29	5.0	26	30
CL120-12BM	120	15.6	64	29	5.0	26	30
CL120-16BM	120	15.6	68	29	5.0	30	30
CL150-10BM	150	16.7	71	32	5.5	32	30
CL150-12BM	150	16.7	80	32	5.5	41	30
CL150-16BM	150	16.7	80	32	5.5	41	30
CL185-10BM	185	18.4	74	35	5.7	32	32
CL185-12BM	185	18.4	83	35	5.7	41	32
CL185-16BM	185	18.4	83	35	5.7	41	32
CL240-12BM	240	21.2	92	40	7.1	42	38
CL240BM	240	21.2	92	40	7.1	42	38
CL300BM	300	23.5	101	45	7.8	46	42