


Copper Cable Lug Non-Inspection Hole

1. The lugs are made from high conductivity annealed copper which gives the best electrical properties possible.
2. Material: copper-99.9% pure.
3. Operating Temperature:-55°C to 155°C due to oxygen-free copper
4. Surface: Tin plating.
5. Conformant Standards: IEC(Fra.)DIN/VDE(Ger.)

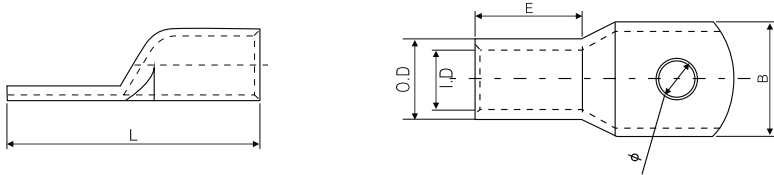

Part No.	Dimensions(mm)					
	Φ	I.D	O.D	E	B	L
SCA1.5-4	4.2	2.0	3.5	8.0	8.0	16.0
SCA1.5-5	5.2	2.0	3.5	10.0	10.0	17.0
SCA1.5-6	6.5	2.0	3.5	10.0	10.0	18.0
SCA2.5-4	4.2	2.8	4.0	8.0	8.0	18.0
SCA2.5-5	5.2	2.8	4.0	10.0	10.0	20.0
SCA2.5-6	6.5	2.8	4.0	10.0	10.0	20.0
SCA2.5-8	8.4	2.8	4.0	12.5	12.5	23.0
SCA4-4	4.2	3.1	4.5	10.0	10.0	20.0
SCA4-5	5.2	3.1	4.5	10.0	10.0	20.0
SCA4-6	6.5	3.1	4.5	10.0	10.0	20.0
SCA4-8	8.4	3.1	4.5	12.5	12.5	23.0
SCA6-4	4.2	4.0	5.5	10.0	10.0	23.0
SCA6-5	5.2	4.0	5.5	10.0	10.0	24.0
SCA6-6	6.5	4.0	5.5	12.0	12.0	24.0
SCA6-8	8.4	4.0	5.5	12.5	12.5	26.0
SCA10-5	5.2	4.5	6.1	12.0	12.0	25.0
SCA10-6	6.5	4.5	6.1	12.0	12.0	25.0
SCA10-8	8.4	4.5	6.1	12.5	12.5	27.0
SCA10-10	10.5	4.5	6.1	15.0	15.0	29.0
SCA10-12	13.0	4.5	6.1	17.0	17.0	31.0
SCA16-6	6.5	5.4	7.0	12.0	12.0	30.0
SCA16-8	8.4	5.4	7.0	12.5	12.5	30.0
SCA16-10	10.5	5.4	7.0	16.0	16.0	33.0
SCA16-12	13.0	5.4	7.0	17.0	17.0	35.0
SCA25-6	6.5	7.0	9.0	13.0	13.0	33.0
SCA25-8	8.4	7.0	9.0	15.0	15.0	33.0
SCA25-10	10.5	7.0	9.0	18.0	18.0	34.0
SCA25-12	13.0	7.0	9.0	18.0	18.0	35.0
SCA35-6	6.5	8.2	10.5	16.0	16.0	38.0
SCA35-8	8.4	8.2	10.5	16.0	16.0	38.0
SCA35-10	10.5	8.2	10.5	18.0	18.0	39.0
SCA35-12	13.0	8.2	10.5	19.0	19.0	40.5
SCA35-14	15.0	8.2	10.5	20.0	20.0	42.0
SCA50-6	6.5	9.8	12.4	17.8	17.8	45.0
SCA50-8	8.4	9.8	12.4	17.8	17.8	45.0
SCA50-10	10.5	9.8	12.4	17.8	17.8	45.0
SCA50-12	13.0	9.8	12.4	20.0	20.0	45.0

Part No.	Dimensions(mm)					
	Φ	I.D	O.D	E	B	L
SCA70-8	8.4	11.5	14.5	21.0	21.0	52.0
SCA70-10	10.5	11.5	14.5	21.0	21.0	52.0
SCA70-12	13.0	11.5	14.5	21.0	21.0	52.0
SCA70-14	15.0	11.5	14.5	21.0	21.0	52.0
SCA95-8	8.4	13.7	17.1	23.0	23.0	58.0
SCA95-10	10.5	13.7	17.1	23.0	23.0	58.0
SCA95-12	13.0	13.7	17.1	23.0	23.0	58.0
SCA95-14	15.0	13.7	17.1	22.0	23.0	58.0
SCA120-10	10.5	15.0	19.0	22.0	22.0	63.0
SCA120-12	13.0	15.0	19.0	22.0	22.0	63.0
SCA120-14	15.0	15.0	19.0	22.0	22.0	63.0
SCA120-16	17.0	15.0	19.0	22.0	22.0	63.0
SCA150-10	10.5	16.8	21.0	26.0	26.0	70.0
SCA150-12	13.0	16.8	21.0	26.0	26.0	70.0
SCA150-14	15.0	16.8	21.0	26.0	26.0	70.0
SCA150-16	17.0	16.8	21.0	26.0	26.0	70.0
SCA150-20	21.0	16.8	21.0	26.0	26.0	70.0
SCA185-10	10.5	19.0	23.5	26.0	32.0	75.0
SCA185-12	13.0	19.0	23.5	32.0	32.0	75.0
SCA185-14	15.0	19.0	23.5	32.0	32.0	75.0
SCA185-16	17.0	19.0	23.5	32.0	32.0	75.0
SCA240-10	10.5	21.0	26.0	38.0	38.0	90.0
SCA240-12	13.0	21.0	26.0	38.0	38.0	90.0
SCA240-14	15.0	21.0	26.0	38.0	38.0	90.0
SCA240-16	17.0	21.0	26.0	38.0	38.0	90.0
SCA300-12	13.0	24.0	30.0	42.0	42.0	98.0
SCA300-14	15.0	24.0	30.0	42.0	42.0	98.0
SCA300-16	17.0	24.0	30.0	42.0	42.0	98.0
SCA400-14	15.0	27.0	34.0	44.0	44.0	110.0
SCA400-16	17.0	27.0	34.0	44.0	44.0	110.0
SCA400-20	21.0	30.0	34.0	44.0	44.0	110.0
SCA500-10	10.5	30.0	38.0	48.0	48.0	120.0
SCA500-12	13.0	30.0	38.0	48.0	48.0	120.0
SCA500-14	15.0	30.0	38.0	48.0	48.0	120.0
SCA500-16	17.0	30.0	38.0	48.0	48.0	120.0
SCA500-20	21.0	30.0	38.0	48.0	48.0	120.0
SCA630-16	17.0	35.0	44.0	56.0	56.0	140.0
SCA630-20	21.0	35.0	44.0	56.0	56.0	140.0