

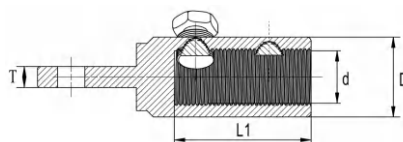


⚡ Mechanical Cable Lug , up to 52 kV

- 1.Connector Body:high strength aluminum alloy
- 2.Bolts:brass,tin-plated,with inner and outer hexagon or aluminum alloy
- 3.Connector Body Surface:tin-plated



Part No.	Cross Section Range (mm ²)	Number of Shear headed Bolts	Bolt Head Size(mm)	Palm Holo Diameter (mm)	Length (mm)		Inner Diameter D	Outer Diameter d
			AF	Ø	L	L1		
BMCL-16/95-16-630A	16-95	1	13	16.3	75	32.5	19	12.8
BMCL-95/240-16-630A	95-240	2	19	16.3	107	56	33	20
BMCL-185/300-16-800A	185-300	2	22	16.3	112.5	65	38	24
BMCL-185/400-16-1250A	185-400	3	22	16.3	115	100	50	26
BMCL-240/400-16-800A	240-400	3	22	16.3	112.5	75	38	26
BMCL-500/630-16-1250A	500-630	3	27	16.3	155	100	50	33
BMCL-800-16-1250A	800	4	27	16.3	185	130	56	36