


Copper Crimp Lug (Australia Standard)

1. The lugs are made from 99.9%+cu high conductivity annealed copper which gives the best electrical properties possible , They are capable of standing with a continuous operating temperature of 155°C,which is well above the temperature properties of moslugs.
2. Material: copper-99.95% pure
3. Operating Temperature:-55°C to 155°C due to oxygen-free copper
4. Suace: Tin plating
5. Conformant Standard: AS4325-1(AUS)

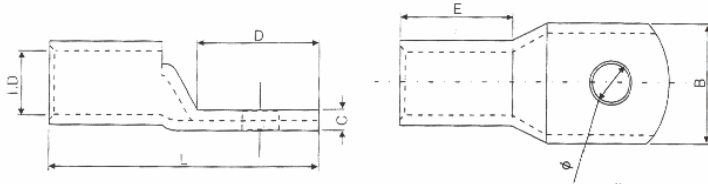

Part No.	Stud	IE Size	Dimensions(mm)				
			E	L	B	C	D
CL1.5-5	5.2	1.8	7	18	8	1.0	1.0
CL1.5-6	6.5	1.8	7	20	10	0.8	0.8
CL2.5-4	4.2	2.4	7	18	8	1.0	1.0
CL2.5-5	5.2	2.4	7	20	10	0.8	0.8
CL2.5-6	6.5	2.4	7	20	10	0.8	0.8
CL2.5-8	8.4	2.4	7	24	11	0.7	0.7
CL4-5	5.2	3.1	9	22	10	1.0	1.0
CL4-6	6.5	3.1	9	22	10	1.0	1.0
CL4-8	8.4	3.1	9	26	12	0.8	0.8
CL6-5	5.2	3.1	9	23	10	1.2	1.2
CL6-6	6.5	3.8	9	27	12	1.0	1.0
CL6-8	8.4	3.8	9	27	12	1.0	1.0
CL6-10	10.5	3.8	9	32	16	0.8	0.8
CL10-5	5.2	4.7	10	27	12	1.8	1.8
CL10-6	6.5	4.7	10	27	12	1.8	1.8
CL10-8	8.4	4.7	10	29	14	1.5	1.5
CL10-10	10.5	4.7	10	32	16	1.3	1.3
CL10-12	13.0	4.7	10	37	18	1.2	1.2
CL16-6	6.5	5.5	19	37	11	2.3	2.3
CL16-8	8.4	5.5	19	39	14	1.7	1.7
CL16-10	10.5	5.5	19	41	16	1.5	1.5
CL16-12	13.0	5.5	19	46	18	2.4	2.4
CL25-6	6.5	7.1	21	41	14	2.4	2.4
CL25-8	8.4	7.1	21	41	14	2.4	2.4
CL25-10	10.5	7.1	21	44	16	2.0	2.0
CL25-12	13.0	7.1	21	48	18	1.6	1.6
CL35-6	6.5	8.2	21	44	16	3.0	3.0
CL35-8	8.4	8.2	21	44	16	3.0	3.0
CL35-10	10.5	8.2	21	46	18	2.6	2.6
CL35-12	13.0	8.2	21	50	20	2.3	2.3
CL50-6	6.5	9.5	22	48	18	3.2	3.2
CL50-8	8.4	9.5	22	48	18	3.2	3.2
CL50-10	10.5	9.5	22	48	18	2.2	2.2
CL50-12	13.0	9.5	22	52	21	2.2	2.2

Part No.	Stud	IE Size	Dimensions(mm)				
			E	L	B	C	D
CL70-6	6.2	11.2	24.0	54	21	3.3	24
CL70-8	8.4	11.2	24.0	54	21	3.3	24
CL70-10	10.5	11.2	24.0	54	21	3.3	24
CL70-12	13.0	11.2	24.0	54	21	3.3	24
CL70-16	17.0	11.2	24.0	64	28	2.4	34
CL95-8	8.4	13.4	27.0	60	25	3.9	26
CL95-10	10.5	13.4	27.0	60	25	3.9	26
CL95-12	13.0	13.4	27.0	60	25	3.9	26
CL95-16	17.0	13.4	27.0	64	28	3.4	30
CL120-8	8.4	15.6	30.0	64	29	5.0	26
CL120-10	10.5	15.6	30.0	64	29	5.0	26
CL120-12	13.0	15.6	30.0	68	29	5.0	26
CL120-16	17.0	15.6	30.0	81	29	5.0	30
CL120-20	21.0	15.6	30.0	71	34	5.2	42
CL150-10	10.5	16.7	30.0	80	32	5.5	32
CL150-12	13.0	16.7	30.0	80	32	5.5	41
CL150-16	17.0	16.7	30.0	74	32	5.5	41
CL180-10	10.5	16.7	32.0	83	35	5.7	32
CL180-12	13.0	18.4	32.0	83	35	5.7	41
CL180-16	17.0	18.4	32.0	84	35	5.7	41
CL180-20	21.0	18.4	32.0	92	38	5.0	42
CL240-10	10.5	21.2	38.0	92	40	7.1	42
CL240-12	13.0	21.2	38.0	101	40	7.1	42
CL240-16	16.3	23.5	42.0	101	45	7.8	46
CL300-10	10.5	23.5	42.0	101	45	7.8	46
CL300-12	13.0	23.5	42.0	114	45	7.8	46
CL400-12	13.0	26.8	44.0	124	50	7.7	52
CL500-12	13.0	30.0	48.0	124	56	8.5	56
CL630-12	12.3	30.0	56.0	142	65	10.9	56