



Bimetallic Lug(CAU-XX (IEC Standard))

Technical Note :

- Material :** Copper Palm - Ec Grade Forged Copper (copper Purity 99.9%)And Al - Ec Grade Aluminium Rod
- Finish :** Natural And Degreased
- Welding Process :** High Speed Friction Welding
- Al Barrel Filled With Oxide Inhabiting Compound And Sealed By Plastic Cap
- All Dimensions Are In Mm Unless Otherwise Specified
- Unspecified Tolerance :** $\pm 2\%$
- Standard:** DIN46329

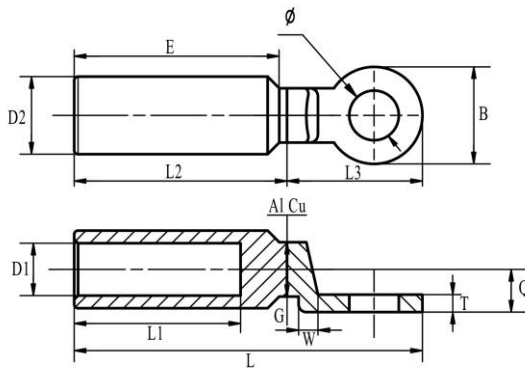

Part No.	Dimensions (mm)						
	$\Phi \pm 0.3$	$D2 \pm 0.5$	$D1 \pm 0.3$	$L \pm 2$	$L1 \pm 1$	$B \pm 0.5$	$T \pm 0.3$
CAU-16	10.5	16	5.5	85	43	20	4.5
CAU-25	10.5	16	6.5	85	43	20	4.5
CAU-35	12.8	16	8	90	43	25	5
CAU-50	12.8	20	9	90	43	25	5
CAU-70	12.8	20	11.5	90	43	25	5
CAU-95	12.8	20	12.5	90	43	25	5
CAU-120	12.8	25	13.7	115	59	30	6
CAU-150	12.8	25	15.5	115	59	30	6
CAU-185	12.8	32	17	115	59	35	6
CAU-240	12.8	32	19.5	115	59	35	6
CAU-300	16.5	40	23.3	158	93	36	7
CAU-400	16.5	40	26	158	93	36	7
CAU-500	16.5	40	29	200	94	60X60	10
CAU-630	16.5	47	32.5	200	94	60X60	10