
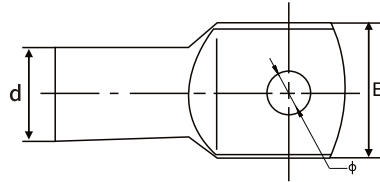


DIN46235 Copper Cable Lug

1. The lugs are made from high conductivity annealed copper which gives the best electrical properties possible.
2. Material: copper-99.9% pure.
3. Operating Temperature:-55°C to 155°C due to oxygen-free copper
Surface: Tin plating.
4. Conformant Standards:DIN46235



Part No.	Dimensions(mm)					
	D	d	L	W	B	Φ
DIN6-5	5.5	3.8	30.5	8.5	10.0	5.3
DIN6-6	5.5	3.8	31.5	8.5	10.0	6.4
DIN6-8	5.5	3.8	34.0	13.0	10.0	8.4
DIN10-5	6.0	4.5	34.0	9.0	10.0	5.3
DIN10-6	6.0	4.5	34.5	9.0	10.0	6.4
DIN10-8	6.0	4.5	37.0	13.0	10.0	8.4
DIN10-10	6.0	4.5	39.0	15.0	10.0	10.5
DIN16-6	8.5	5.5	43.5	13.0	20.0	6.4
DIN16-8	8.5	5.5	46.0	13.0	20.0	8.4
DIN16-10	8.5	5.5	48.0	17.0	20.0	10.5
DIN16-12	8.5	5.5	49.0	18.0	20.0	13
DIN25-6	10.0	7.0	45.5	14.0	20.0	6.4
DIN25-8	10.0	7.0	48	16.0	20.0	8.4
DIN25-10	10.0	7.0	50	17.0	20.0	10.5
DIN25-12	10.0	7.0	51	19.0	20.0	13.0
DIN35-6	12.5	8.2	49.5	17.0	20.0	6.4
DIN35-8	12.5	8.2	52	17.0	20.0	8.4
DIN35-10	12.5	8.2	54	19.0	20.0	10.5
DIN35-12	12.5	8.2	55	21.0	20.0	13.0
DIN35-14	12.5	8.2	56.5	21.0	20.0	6.4
DOM50-8	14.5	10.0	62	20.0	28.0	8.4
DIN50-10	14.5	10.0	64	22.0	28.0	10.5
DIN50-12	14.5	10.0	65	24.0	28.0	13.0
DIN50-14	14.5	10.0	66.5	24.0	28.0	15.0
DIN50-16	14.5	10.0	68.0	28.0	28.0	17.0

Part No.	Dimensions(mm)					
	D	d	L	W	B	Φ
DIN70-8	16.5	11.5	65.0	24.0	28.0	8.4
DIN70-10	18.5	11.5	67.0	24.0	28.0	12.5
DIN70-12	16.5	11.5	68.0	24.0	28.0	13.0
DIN70-14	16.5	11.5	69.5	24.0	28.0	15.0
DIN70-16	16.5	11.5	71.0	30.0	28.0	17.0
DIN95-8	19.0	13.5	77.0	28.0	35.0	8.4
DIN95-10	19.0	13.5	77.0	28.0	35.0	10.5
DIN95-12	19.0	13.5	78.0	28.0	35.0	13.0
DIN95-14	19.0	13.5	79.5	28.0	35.0	15.0
DIN95-16	19.0	13.5	81.0	32.0	35.0	17.0
DIN120-10	21.0	15.5	85.0	32.0	35.0	10.5
DIN120-12	21.0	15.5	85.0	32.0	35.0	13.0
DIN120-14	21.0	15.5	85.0	32.0	35.0	15.0
DIN120-16	21.0	15.5	85.0	32.0	35.0	17.0
DIN120-20	21.0	15.5	85.0	38.0	35.0	21.0
DIN150-10	23.5	17.0	93.0	34.0	35.0	10.5
DIN150-12	23.5	17.0	94.0	34.0	35.0	13.0
DIN150-14	23.5	17.0	97.0	34.0	35.0	15.0
DIN150-16	23.5	17.0	97.0	34.0	35.0	17.0
DIN150-20	23.5	17.0	99.0	40.0	35.0	21.0
DIN185-10	25.5	19.0	97.0	37.0	40.0	10.5
DIN185-12	25.5	19.0	98.0	37.0	40.0	13.0
DIN185-14	25.5	19.0	101.0	37.0	40.0	15.0
DIN185-16	25.5	19.0	101.0	37.0	40.0	17.0
DIN185-20	25.5	19.0	103.0	40.0	40.0	21.0
DIN240-12	29.0	21.5	108.0	42.0	40.0	13.0
DIN240-14	29.0	21.5	111.0	42.0	40.0	15.0
DIN240-16	29.0	21.5	111.0	42.0	40.0	17.0
DIN240-20	29.0	21.5	113.0	45.0	40.0	19.0
DIN300-12	32.0	24.5	119.0	46.0	50.0	13.0
DIN300-14	32.0	24.5	119.0	46.0	50.0	15.0
DIN300-16	32.0	24.5	119.0	46.0	50.0	17.0
DIN300-20	32.0	24.5	119.0	48.0	50.0	21.0
DIN400-14	38.5	27.5	140.0	55.0	70.0	15.0
DIN400-16	38.5	27.5	140.0	55.0	70.0	17.0
DIN400-20	38.5	27.5	140.0	55.0	70.0	21.0
DIN500-16	42.0	31.0	150.0	60.0	70.0	17.0
DIN500-20	42.0	31.0	160.0	60.0	70.0	21.0
DIN630-16	44.0	34.5	160.0	64.0	80.0	17.0
DIN630-20	44.0	34.5	160.0	64.0	80.0	21.0
DIN800-16	52.0	40.0	195.0	75.0	100.0	17.0
DIN800-20	52.0	40.0	195.0	75.0	100.0	21.0
DIN1000-16	58.0	40.0	195.0	85.0	100.0	17.0
DIN1000-20	58.0	44.0	195.0	85.0	100.0	21.0