




⚡ Mechanical Connector up to 42kv with Shear-off-Head Bolt

1. Material: High strength aluminum alloy body, tin plated
2. Contact bolts made of special aluminum alloy or brass tin plated
3. Aluminium barrel is filled by neutral grease;
4. Dimension in mm
5. Standard according to IEC61238-1

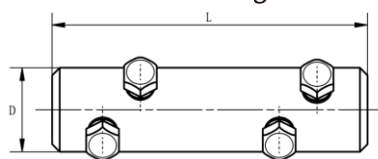

Part No.	Crossection (mm)	NOMINAL DIMENSIONS-mm				Bolt Quantity	Bolt head AF(mm)
		L	L1	D	d		
TMC-10/35	10-35	45	20	19	8.5	2	10
TMC-25/95	25-95	65	30	24	12.8	2	13
TMC-35/150	35-150	80	35	28	15.8	2	17
TMC-95/240	95-240	125	60	33	20	4	19
TMC-120/300	120-300	140	65	37	24	4	22
TMC-185/400	185-400	170	80	42	25.5	6	22
TMC-500	500	190	90	46	30	6	22 or 27
TMC-630	630	200	95	50	33	6	22 or 27
TMC-800	800	270	130	56	36	8	22 or 27