
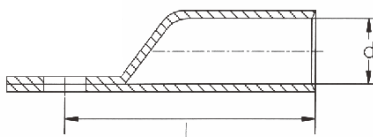


AUS Copper Cable Lug

1. The lugs are made from high conductivity annealed copper which gives the best electrical properties possible.
2. Material: copper-99.9% pure.
3. Operating Temperature:-55°C to 155°C due to oxygen-free copper
4. Surface: Tin plating.

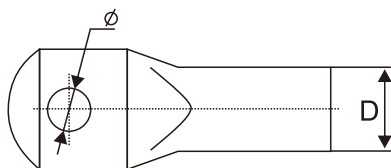

Part No.	Dimensions(mm)				Package (pcs)
	$\Phi \pm 0.5$	$D \pm 0.5$	$d \pm 0.5$	$L \pm 2$	
AUS-10	6.5, 8.5	6.5	5.0	8	6000
AUS-16	6.5, 8.5,	8.0	6.0	10	2400
AUS-25	5.6, 8.5, 10.5	10.5	8.0	12	1800
AUS-35	8.5, 10.5	12.5	9.5	13	840
AUS-50	8.5, 10.5, 12.5	14.5	11.0	15	600
AUS-70	8.5, 10.5, 12.5	16.5	13.0	15	360
AUS-95	10.5, 12.5, 14.5	19.0	14.5	15	240
AUS-120	10.5, 12.5, 14.5	20.5	16.0	16	180
AUS-150	10.5, 12.5, 14.5	23.5	18.0	16	144
AUS-185	10.5, 12.5, 14.5	26.0	20.5	17	120
AUS-240	10.5, 14.5	28.0	22.5	21	84
AUS-300	16.5, 20.5	30.0	23.5	21	66
AUS-400	16.5, 20.5	34.0	26.0	140	36
AUS-500	16.5, 20.5	38.0	29.0	150	30
AUS-630	20.5, 25	45.0	35.0	160	24