


## Copper Splice

1. Neutral grease filled, extremity closed by a protection cap
2. IEC61238 Standard

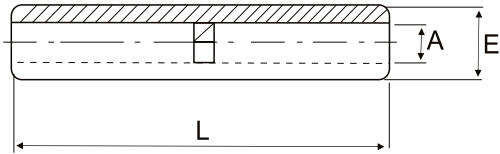

| Part No. | Dimensions(mm) |    |     |
|----------|----------------|----|-----|
|          | A              | E  | L   |
| GLC 16   | 6.3            | 16 | 95  |
| GLC 25   | 7.5            | 16 | 95  |
| GLC 35   | 8.5            | 16 | 95  |
| GLC 50   | 9.5            | 20 | 95  |
| GLC 70   | 11             | 20 | 95  |
| GLC 95   | 13             | 20 | 95  |
| GLC 120  | 14.2           | 25 | 102 |
| GLC 150  | 16             | 25 | 102 |
| GLC 185  | 18             | 25 | 102 |
| GLC 240  | 20             | 32 | 102 |
| GLC 300  | 23             | 32 | 102 |
| GLC 400  | 26             | 33 | 102 |