



MCCB Bi-metal Lug

1. MCCB Bimetal Lugs are made from the highest quality aluminium and copper, joined using a friction welding process, The barrels are filled with a jointing compound. Which breaks the oxide layers on the aluminium.

Technical Data

Conductive Material

- Aluminium:99.6% pure
- Copper:99.9% pure
- Tensile Strength:110MPa
- Ductile Rating:28%
- Joining Method :Friction Welding(IEC std)
- Operating Temperature
-40°C to 100°C

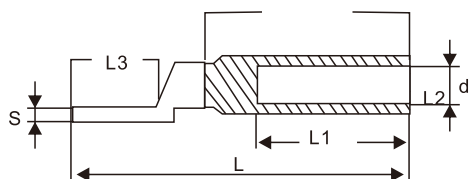

Part No.	Dimension(mm)				
	D	d	L	W	S
MCCB-16	16	5.5	82	14	3.2
MCCB-25	16	6.5	82	14	3.2
MCCB-35	16	8.2	82	14	3.2
MCCB-50	20	9.7	90	16	5.2
MCCB-70	20	11.0	90	16	5.2
MCCB-95	20	12.5	90	16	5.2
MCCB-120	25	14.5	120	23	6.5
MCCB-150	25	16.5	120	23	6.5
MCCB-185	32	17.5	125	29	8.0
MCCB-240	32	19.5	125	29	8.0