


Bimetallic Lug (DTL-2-XX-S)

Technical Note :

1. **Material :** Copper Palm - Ec Grade Forged Copper (copper Purity 99.9%) And Al - Ec Grade Aluminium Rod
2. **Finish :** natural And Degreased
3. **Welding Process :** High Speed Friction Welding
4. Al Barrel Filled With Oxide Inhabiting Compound And Sealed By Plastic Cap
5. All Dimensions Are In Mm Unless Otherwise Specified
6. **Unspecified Tolerance :** $\pm 2\%$

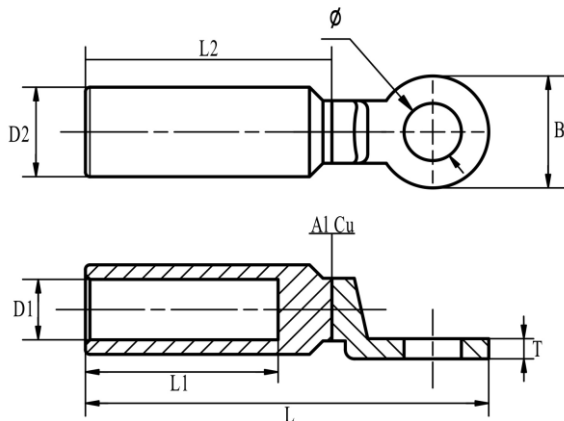

Part No.	Dimensions (mm)						
	$\Phi \pm 0.3$	$D2 \pm 0.2$	$D1 \pm 0.2$	$L \pm 1$	$L1 \pm 0.5$	$B \pm 0.2$	$T \pm 0.1$
DTL-2-16S	10	16	6	82	41	24	3
DTL-2-25S	10	16	7	82	41	24	3
DTL-2-35S	10	16	8.5	82	41	24	3
DTL-2-50S	13	20	10	90	43	25	3.5
DTL-2-70S	13	20	11.5	90	43	25	3.5
DTL-2-95S	13	20	13.5	90	43	25	3.5
DTL-2-120S	13	25	15	113	60	28	4.2
DTL-2-150S	13	25	17	113	60	28	4.2
DTL-2-185S	13	32	18.5	130	62	35	5
DTL-2-240S	13	32	21.5	130	62	35	5
DTL-2-300S	13	34	24	135	63.5	36	5
DTL-2-400S	17	34	26	135	63.5	36	5