


Bimetallic Lug (BLF-DIN)

Technical Note :

- Material :** Copper Palm - Ec Grade Forged Copper (copper Purity 99.9%) And Al - Ec Grade Aluminium Rod
- Finish :** natural And Degreased
- Welding Process :** High Speed Friction Welding
- Al Barrel Filled With Oxide Inhabiting Compound And Sealed By Plastic Cap
- All Dimensions Are In Mm Unless Otherwise Specified
- Unspecified Tolerance :** $\pm 2\%$
- Standard:** DIN46329

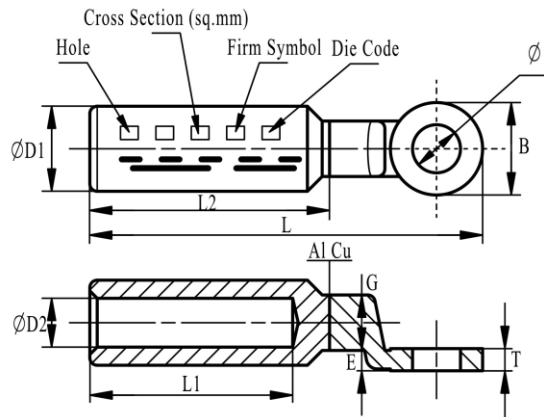

Part No.	Cable Section		Dimensions(mm)							Die Code
	rm/sm	re/se	ΦD1±0.3	ΦD2±0.3	Φ±0.2	B±0.5	L±3	L1±0.5	T±0.4	
BLF-DIN-16	16	25	6	12	10.5	20	69	28	4.5	3
BLF-DIN-25	23	35	7	12	10.5	20	76	36	4.5	4-2
BLF-DIN-35	35	50	8	14	10.5	25	83	42	4.5	5-2
					13.0					
BLF-DIN-50	50	70	10	16	10.5	25	87	42	5	5-2
					13.0					
BLF-DIN-70	70	95	11.2	18.5	10.5	25	97	52	5	6-3
					13.0					
BLF-DIN-95	95	120	13.2	22	10.5	25	101	52	5	6-3
					13				6	
					17					
BLF-DIN-120	120	150	14.7	23	13	30	108	52	6	6-3
					17					
BLF-DIN-150	150	185	16.3	25	13	30	115	62	6	6-3
					17					
BLF-DIN-185	185	240	18.3	28.5	13	35	122	62	7	6-3
					17					
BLF-DIN-240	240	300	21	32	13	35	132	70	7	8-3
					17					
BLF-DIN-300	300	400	23.5	34	13	35	132	70	7	8-3
					17					