

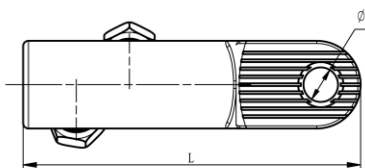


⚡ Mechanical Cable Lug up to 52kv with Shear-off-Head Bolt

1. Material: High strength aluminum alloy body, tin plated
2. Contact bolts made of special aluminum alloy or brass tin plated
3. Aluminium barrel is filed by neutral grease;
4. Dimension in mm
5. Standard according to IEC61238-1



Part No.	Conductor range	Dimensions (mm)						No. of Bolt	Size of Bolt AF
		D	d	L	L1	Ø1	T		
BMCL-16/95-N	16/95	24	12.5	72	32	13 or 17	10	1	SW10&SW6
BMCL-25/150-N	25/150	28	15.8	95	35	13 or 17	12.5	1	SW10&SW6
BMCL-95/240-N	95/240	33	20	113	56	13 or 17	14	2	SW13&SW6
BMCL-120/300-N	120/300	38	25	125	67	13 or 17	14	2	SW19&SW6
BMCL-185/400-N	185/400	42	26	143	82	13 or 17	14.5	3	SW19&SW6
BMCL-400/630-N	400/630	50	33	165	94	13, 17 or 21	20	3	SW19&SW8