


Mechanical Connector up to 52 kV With Shear-off-head bolts

1. Material: High strength aluminum alloy body, tin plated
2. Contact bolts made of special aluminum alloy or brass tin plated
3. Aluminium barrel is filed by neutral grease;
4. Dimension in mm
5. Standard according to IEC61238-1

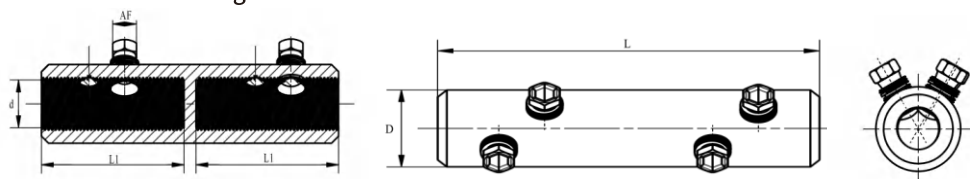

Part No.	Conductor range	Dimensions (mm)				No. of Bolt	Size of Bolt AF	Screw Specifications
		L	L1	D	d			
BMC-10/35NW	10-35	45	20	19	8.5	2	SW10&SW6	M10
BMC-16/95NW	16-95	70	32	24	12.5	2	SW10&SW6	M12
BMC-25/150NW	25-150	85	35	30	15.8	2	SW10&SW6	M14
BMC-95/240NW	95-240	120	56	33	20	4	SW13&SW6	M18
BMC-120/300NW	120-300	142	67	38	25	4	SW19&SW6	M22
BMC-185/400NW	185-400	170	82	42	26	6	SW19&SW6	M22
BMC-400/630NW	400-630	200	94	52	34	6	SW19&SW6	M24
BMC-800NW	800	220	105	60	37	8	SW19	M24
BMC-1000NW	1000	220	105	60	41	8	SW19	M24