


Bimetal Cable Lug (TCL)

1. TCL/S bimetallic cable lug manufactured from aluminium alloy tube of purity equal or higher than 99.5%.
2. The complete cable lug surface is tinned by means of an electrolytic process.
3. Incorporates neutral grease to avoid aluminium oxidation.
4. It is especially designed for underground cable connections.
5. According to IEC61238-1 standard.

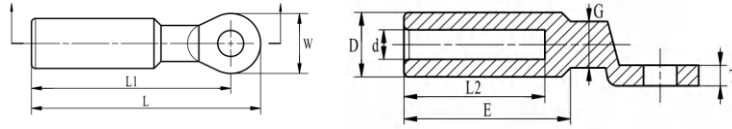

Part No.	Conductor range	Dimensions (mm)				
		L	L1	D	d	T
TCL/S-16-10	16	78.5	40	16	5.5	9
TCL/S-25-12	25	78.5	40	16	6.5	9
TCL/S-35-12	35	78.5	40	16	8	9
TCL/S-50-12	50	88.5	40	20	9	11
TCL/S-70-12	70	88.5	40	20	11	11
TCL/S-95-12	95	88.5	40	20	12.5	11
TCL/S-120-12	120	108.5	55.5	25	13.7	13
TCL/S-150-12	150	108.5	55.5	25	15.5	13
TCL/S-185-12	185	108.5	55.5	32	17	17
TCL/S-240-12	240	108.5	55.5	32	19.5	17
TCL/S-300-12	300	153.5	89	40	23.3	21
TCL/S-400-12	400	153.5	89	40	26	21