


DIN 46267 Aluminium Connector

1. It is accordance with DIN46267 with markings for correct crimping
2. The barrel capped is filled with joint compound to avoid oxidization

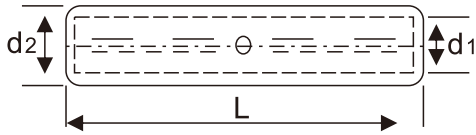

Part No.	Dimensions(mm)		
	d1	d2	L
GLI-16	6	10	65
GLI-25	6.8	12	70
GLI-35	8	14	85
GLI-50	9.8	16	85
GLI-70	11.2	18.5	105
GLI-95	13.2	22	105
GLI-120	14.7	23	105
GLI-150	16.3	25	125
GLI-185	18.3	28.5	125
GLI-240	21	32	145
GLI-300	23.3	34	145