


AWG Copper Tube Terminals

1. Terminal Body: Copper

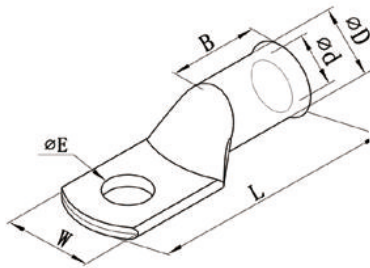

Part No.	Dimensions(mm)						WIRE RANGE A.W.G.mm ²
	ΦE	ΦD	Φd	W	B	L	
8*10	5.1	7.1	4.8	11.8	13	33.3	8 A.W.G. 10mm ²
8*1/4	6.8						
8*5/16	8.4						
8*3/8	10.4						
8*1/2	13.1						
6*10	5.1	8.1	5.9	11.8	15	37.3	6 A.W.G. 16mm ²
6*1/4	6.8						
6*3/8	10.4						
6*5/16	8.4						
6*1/2	13.1						
4*10	5.1	9.5	7.3	13.8	15.5	38.9	4 A.W.G. 25mm ²
4*1/4	6.8						
4*5/16	8.4						
4*3/8	13.1						
4*1/2	5.1						
2*1/4	6.8	11.1	8.5	16.5	16	41.1	2 A.W.G. 35mm ²
2*5/16	8.4						
2*3/8	10.4						
2*1/2	13.1						
1*1/4	6.8						
1*5/16	8.4	11.7	9.1	16.4	16	43.6	1 A.W.G. 50mm ²
1*3/8	11.2						
1*1/2	13.1						
1/0*1/4	6.8						
1/0*5/16	8.4						
1/0*3/8	11.2	13	10.4	18.4	19	46.8	1/0 A.W.G. 60mm ²
1/0*1/2	13.1						
2/0*1/4	6.8						
2/0*5/16	8.4	14.2	11.7	22	22.5	55.9	2/0 A.W.G. 70mm ²
2/0*3/8	10.4						
2/0*1/2	13.1						
3/0*1/4	6.8						
3/0*5/16	8.4						
3/0*3/8	10.4	15.7	13	23.1	22.5	55.9	3/0 A.W.G. 95mm ²
3/0*1/2	13.1						
4/0*1/4	6.8						
4/0*5/16	8.4	17.2	14.2	25.8	24	60.4	4/0 A.W.G. 120mm ²
4/0*3/8	10.4						
4/0*1/2	13.1						